

SPECIFICATIONS:

LOW PITCH BEAMS

MATERIAL AND QUALITY ASSURANCE. Structural glue laminated timber shall be in conformance with AITC Standard (latest edition). Species: Laminating lumber shall be kiln-dried, architectural grade, sealed and wrapped. The roof system for wood structures and buildings are designed to withstand 30 PSF live load and 20 PSF wind load. Please check local codes. For heavier load requirements, please consult with Cedar Forest Products Company. The roof slope shall be 3/12.

LAMINATED SUPPORT COLUMNS

MATERIAL AND QUALITY ASSURANCE. Structural glue laminated timber shall be in conformance with AITC (latest edition). Species: Laminating lumber shall be kiln-dried Port Orford Cedar, architectural appearance grade. Laminated columns shall be sized to suit loading requirements. Manufacturers shall furnish connection steel and hardware for joining structural glue laminated timber members to their supports, exclusive of anchorage and embedment in masonry or concrete (anchor bolts are not furnished).

CONNECTOR PLATES

Plates shall be fabricated from structural steel ASTM-A-36. Plates to be Powder Coated Black. Hardware: A-325 zinc plated machine bolts and nuts.

ROOF DECKING


2" x 6" (nominal), #1 grade, single tongue and groove with V-joint on bottom face, kiln dried southern yellow pine, maximum moisture content shall be 19% or less selected for decking. Specified lengths, with all joints over supports.

SHINGLES





Class "A" fire rated, architectural grade, laminated fiberglass shingle with a 30 year limited warranty. To be installed, over 30 lb. felt. Roof application as per manufacturer's specifications. Color to be approved by owner/design professional.

FASCIA

2x8nom Cedar, "D"/ Better Grade, kiln-dried, Surfaced on Four Sides.

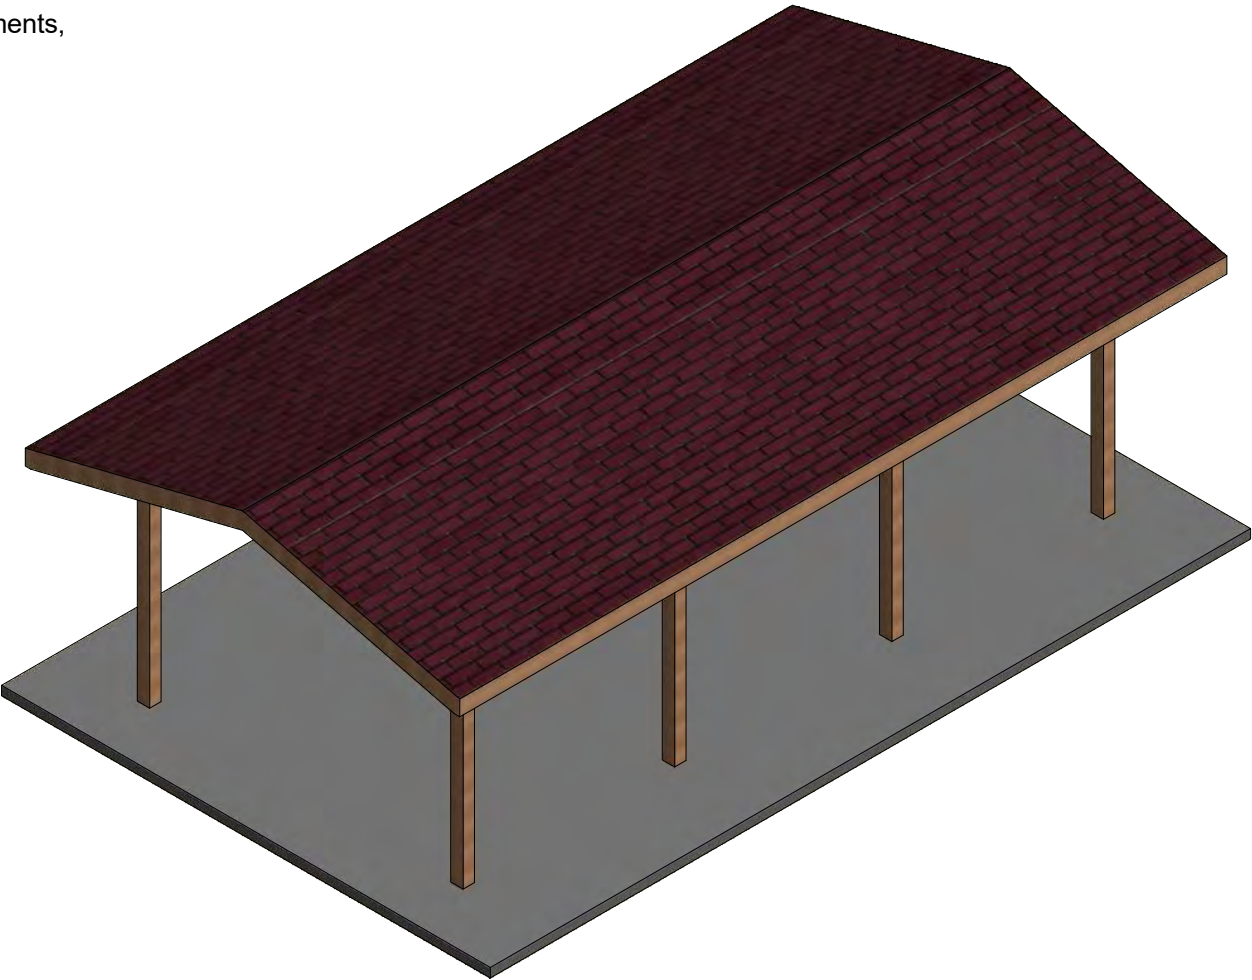

DESCRIPTION:	MODEL #:	DATE:	JES DESIGN #:	REV:
16x28 Lam Beam Gable	LB1628	10/26/2018	LB-STNRD	0

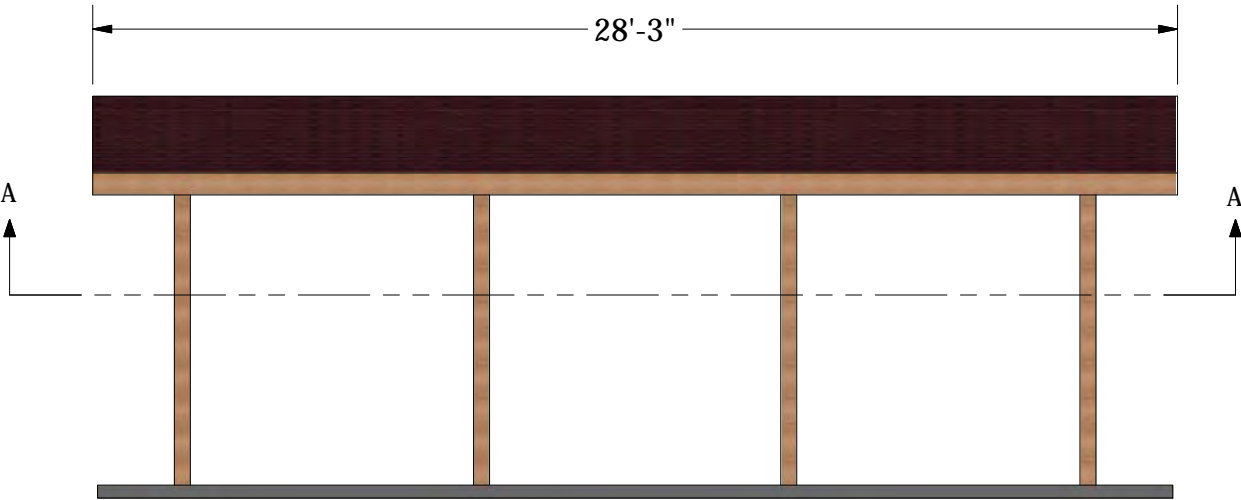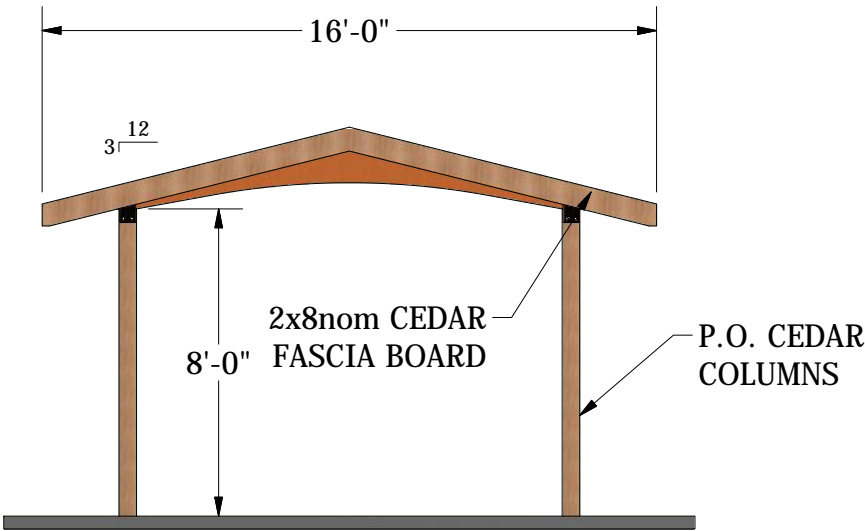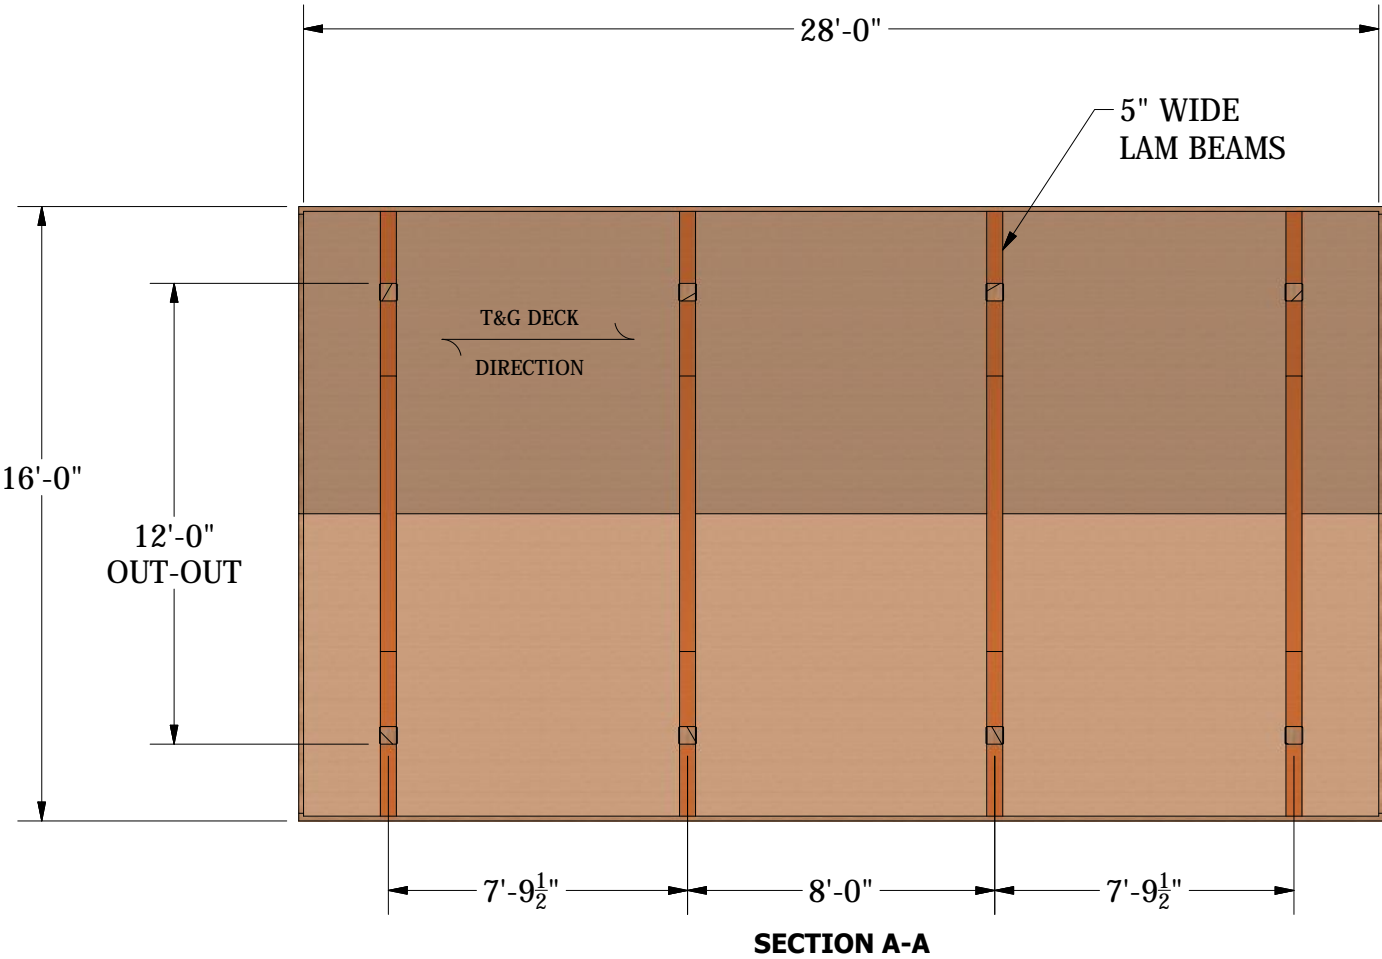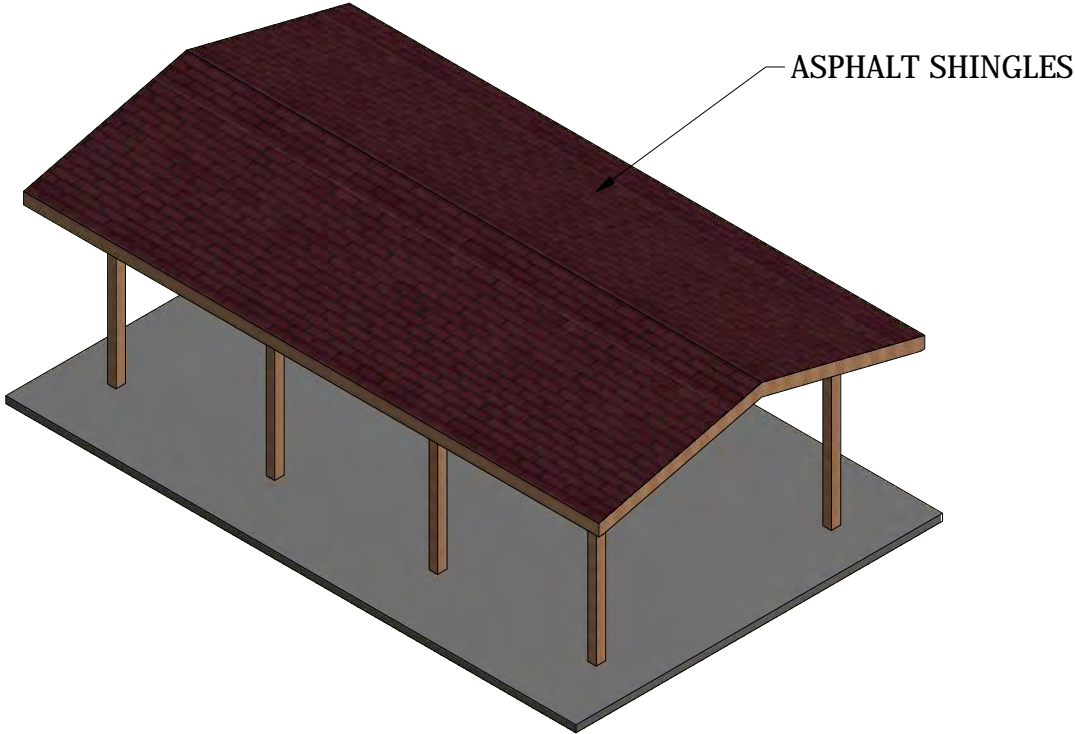

DESCRIPTION: 16x28 Lam Beam Gable	MODEL #: LB1628	DATE: 10/26/2018	JES DESIGN #: LB-STNRD	REV: 0
--------------------------------------	--------------------	---------------------	---------------------------	-----------

WWW.CEDARFORESTPRODUCTS.COM

BASE SHOE

Steel Base Shoe (Powder Coated)
w/ 3/4" \varnothing Anchor Bolts
F1554 HEADED ANCHORS
(By Others)

4" Slab

1'

3"

4'-0"

3"

3"


2' DIA

#6 Vertical Ties
6 Equally
Spaced

#4 Horiz Tie
8" O.C.

Column/Footing Detail
Final Size TBD
Concrete Pier By Others

DESCRIPTION:	MODEL #:	DATE:	JES DESIGN #:	REV:
16x28 Lam Beam Gable	LB1628	10/26/2018	LB-STNRD	0

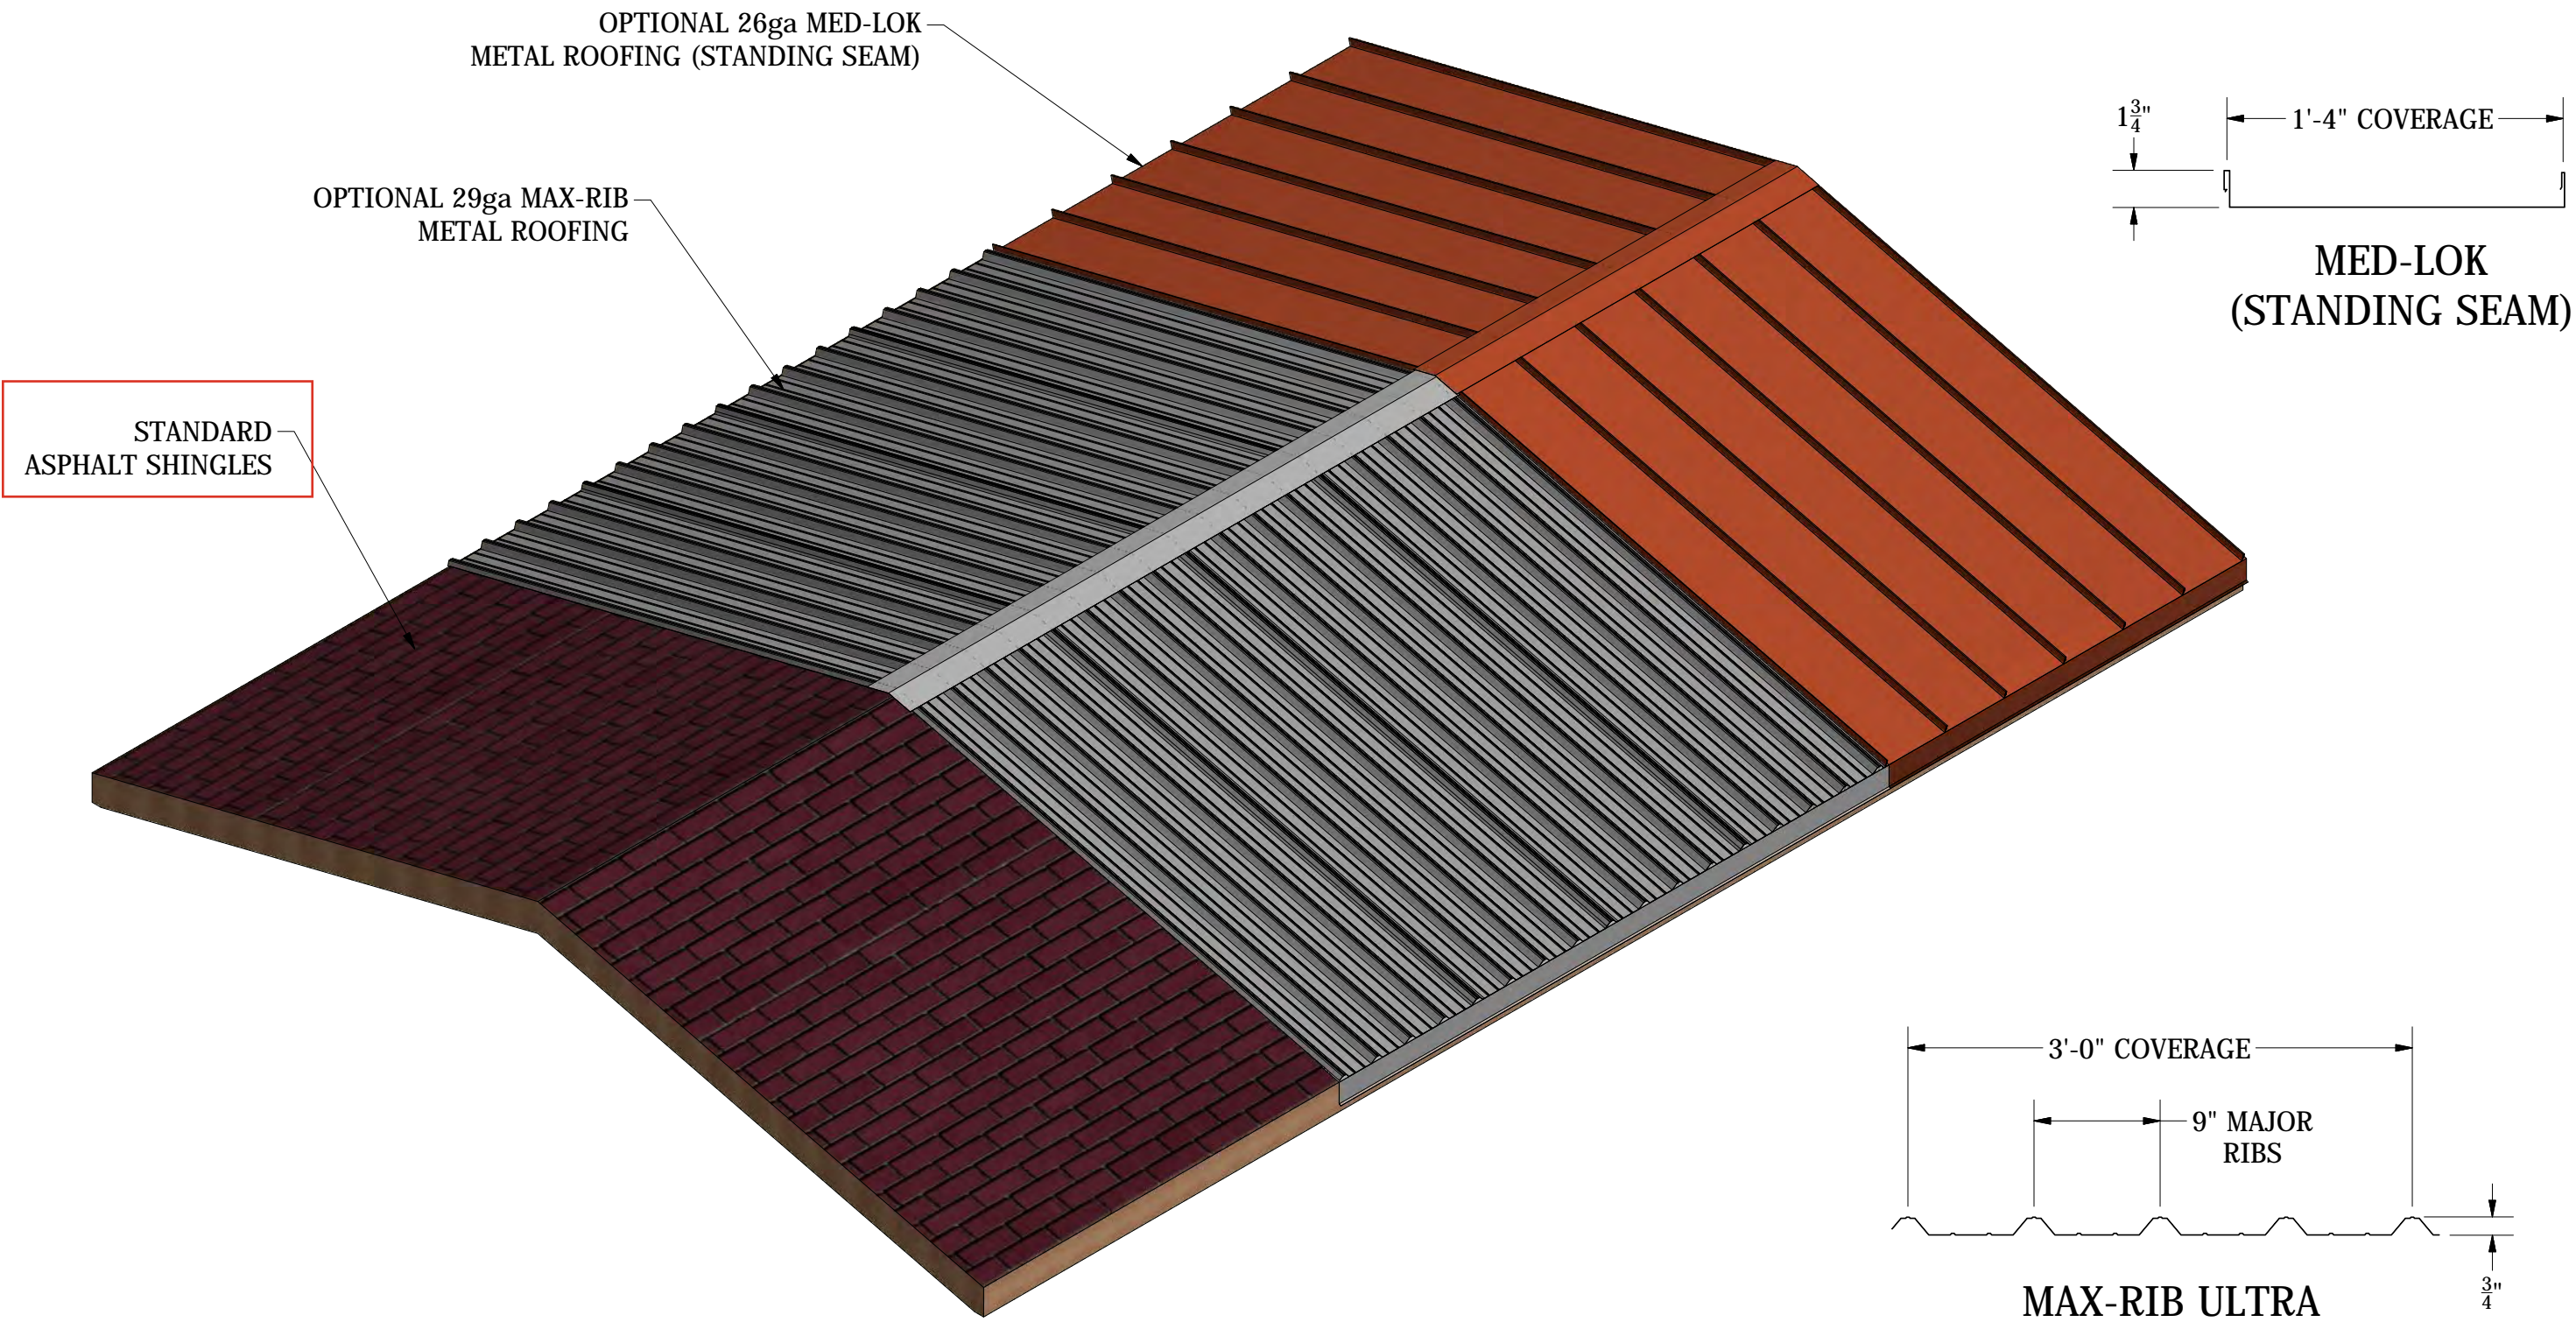

PRELIMINARY LAYOUT
NOT FOR CONSTRUCTION

DESCRIPTION:	MODEL #:	DATE:	JES DESIGN #:	REV:
16x28 Lam Beam Gable	LB1628	10/26/2018	LB-STNRD	0



Cedar Forest Products
800.552.9495
www.cedarforestproducts.com

Color Options

30 Year Architectural Grade – Timberline HD Shingles



Barkwood



Charcoal



Hickory



Shakedown



Biscayne Blue



Weathered Wood



Slate



Hunter Green



Hickory



Fox Hollow Gray



Mission Brown



Oyster Gray



Patriot Red



Pewter Gray



Williamsburg Slate

Due to printing and manufacturing processes, color may vary slightly.




CEDAR FOREST PRODUCTS

P.O. Box 145
West Olive, MI 49460
800-552-9495

www.cedarforestproducts.com

Covering all your needs
since
1964!

STANDARD COLORS



Regal White



Bone White



Surrey Beige



Sandstone



Almond



Buckskin



Ash Gray



Slate Gray




Charcoal



Dark Charcoal



Matte Black



Medium Bronze



Dark Bronze



Patina Green



Evergreen



Mansard Brown



Colonial Red



Roman Blue



Patrician Bronze



Terra Cotta



Galvalume® Plus

* SPECIALTY FINISHES



Brushed Metal



COR-TEN AZP® Raw

* DEEP TONE PREMIUM COLORS



Regal Blue



Brite Red




Hartford Green



Brandywine

* METALLIC COLORS



Preweathered Galvalume



Leadcoat



Silver Metallic



Copper Penny Metallic



Texas Silver Metallic



Champagne Metallic



Learn more about our colors

* WOODGRAINS



Chestnut



Driftwood



Golden Pecan

*Additional Cost Applies